



HP Touchsmart IQ506 Stand Replacement

If your stand on your HP IQ506 has failed, this is how you replace it.

Written By: Nick



INTRODUCTION

Replacing the stand on the HP IQ506.

The part number for the stand this system uses is the HP 507866-001 stand. Note: This part does not include screws. You will need to get the diameter with a digital caliper if you do not have the screws. I DO NOT have this information to hand right now.



TOOLS:

- [64 Bit Driver Kit](#) (1)



PARTS:


- [Stand \(HP Part Number 507866-001\)](#) (1)

Step 1 — Unplug the power supply




- Unplug the power supply from the system.

Step 2 — Remove the RAM door

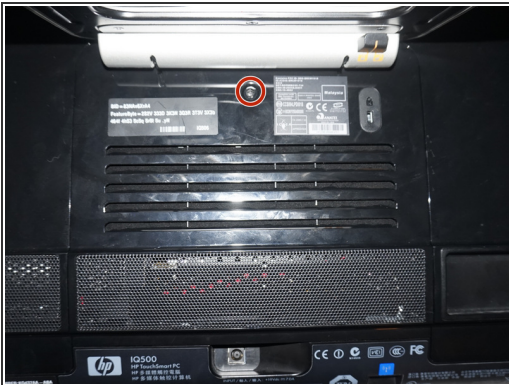



- Unscrew the RAM door from the system. Use a **Phillips #1** screwdriver. Once you do this, unclip it from the bottom and pull forward.

Step 3 — Screwdriver placement tip

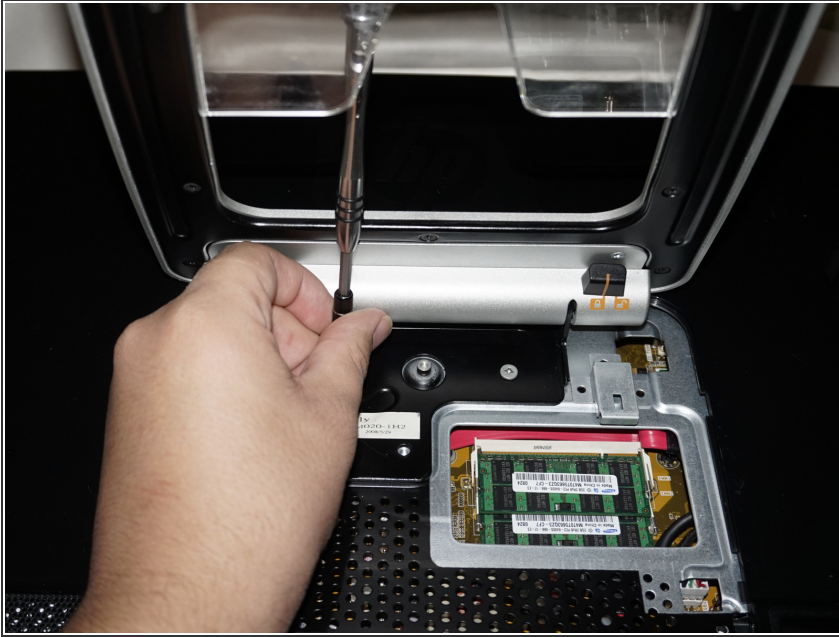

- The top screws on the hinge are a burden to remove. You will have to do something like the pictures here show to make it go a little easier.

Step 4 — Remove the stand

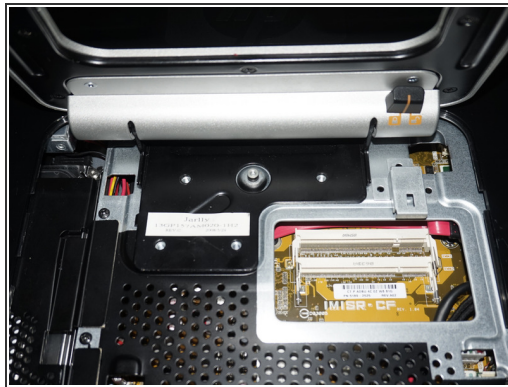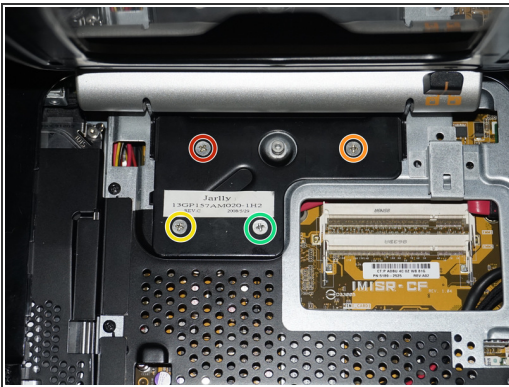

- Remove the stand from the system. Use a **Phillips #1** screwdriver to loosen the 4 screws. Grab the stand up to remove it from the system. There is no need to force it off.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 05:55:26 AM.